


# PEINEMANN X-XLTC

The **Peinemann Single Lance Feeder** (X-XLTC) from the XLTC Series is a powerhouse equipped for challenging pipe cleaning operations. Two Atlas Copco motors provide up to 180 kg (397 lb) push/pull force, and the strong drive unit can handle the most demanding jobs. The versatile design enables the X-XLTC to work with a wide range of hose sizes. The modular components allow for quick cartridge replacement and easy maintenance. Additionally, the X-XLTC can easily be converted into a Dual Lance Tube Feeder (2-XLTC).

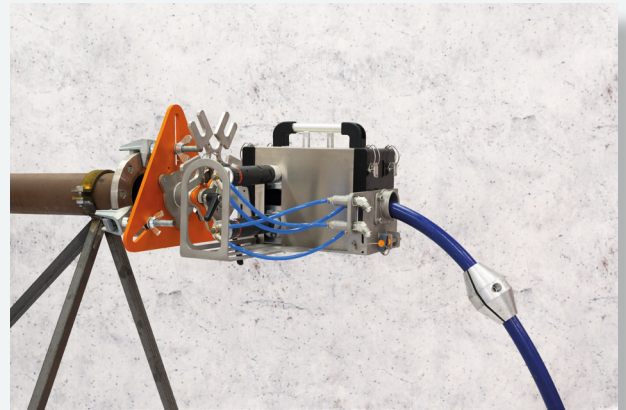

Are you looking for even more powerful and versatile lance pipe cleaning equipment? Then check out the Peinemann TLX Series.

## BENEFITS

**Powerhouse** - Two Atlas Copco motors provide up to 180 kg (397 lb) push/pull force making the X-XLTC the perfect tool for large pipe cleaning operations.


**Versatile** - The Peinemann X-XLTC is a versatile lance pipe feeder. The X-XLTC works with a wide range of hose sizes and can easily be converted into a dual lance tube feeder (2-XLTC).

**Modular design** - The highly modular design enables quick assembly, tool-free cartridge replacement and easy maintenance.

## FEATURES

- Powerhouse with two Atlas Copco motors providing up to 180 kg (397 lb) push/pull force.
- Versatile design is suitable for a wide range of hose sizes and configurations.
- Durable polyurethane friction blocks with a long lifetime.
- Quick assembly, tool-free cartridge replacement and easy maintenance.
- ATEX approved, extensively tested and assembled in the Netherlands.

### CONVERSION TO 2-XLTC

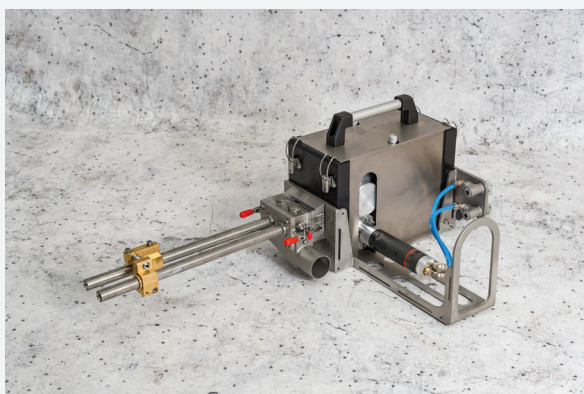

### SNORKEL KIT OPTION



## X-XLTC SPECIFICATIONS

General	
Length (drive unit)	35.5 cm (14.0 in)
Width (drive unit)	44.5 cm (17.5 in)
Height (drive unit)	30.0 cm (11.8 in)
Weight (drive unit incl. cartridges and motors)	22 kg (48 lb)
Hose feed rate	10 - 20 cm/s (3.9 - 7.9 in/s)
Max. push/pull force	180 kg (397 lb)
Pitch adjustment range	N.a.
Motor	
Motor model	Atlas Copco LZB33-L-LR200-50 (2x)
Max. output	0.25 kW (0.34 hp)
Min. air pressure	3.0 bar (43.5 psi)
Operating air pressure	6.3 bar (91.4 psi)
Max. air pressure	7.0 bar (101.5 psi)
Max. air consumption	7.9 l/s (16.7 cfm) (15.8 l/s (33.5 cfm) in total with 2 motors)
Stall torque	24 Nm (17.8 ft lb)
Vane type	Lubrication free
Hose specifications	
Hose size	10/4 - 20/6 (3/8" - 3/4")
Hose outer diameter	18 - 35 mm (0.71 - 1.38 in)
Max. hose coupling diameter	55 mm (2.17 in)